

P=COMPRESSED AIR CONNECTION R=EXHAUST U=VACUUM CONNECTION

Item	PVP 2			
Intake air flow rate	m ³ /h	2.8	2.9	3.0
Maximum level of vacuum	-KPa	60	70	85
Final pressure	mbar abs.	400	300	150
Supply pressure	bar	4	5	6
Optimal supply pressure	bar		6	
Air consumption	NI/s	0.7	0.8	0.9
Operating temperature	°C			-20 / +80
Noise level at optimal supply pressure	dB(A)			78
Weight	g			70

Note: All vacuum values indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and obtained with a constant supply pressure.


Vacuum generator supply must be carried out with non-lubricated compressed air, 5 micron filtration, in accordance with standard ISO 8573-1 class 4.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$


Adapters for GAS - NPT threading available on page 1.130

Air flow rate (NI/s) at different level of vacuum (-KPa) at optimal supply pressure

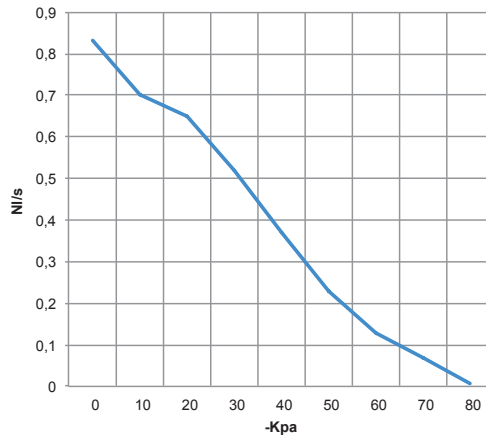

Generator item	Supp. press. bar	Air consumption NI/s	Air flow rate (NI/s) at different levels of vacuums (-KPa) at optimal supply pressure										Max vacuum -KPa
			0	10	20	30	40	50	60	70	80		
PVP 2	6.0	0.9	0.83	0.70	0.65	0.52	0.37	0.23	0.13	0.07	--	85	

Evacuation rates (ms/l = s/m³) at different levels of vacuums (-KPa) at optimal supply pressure

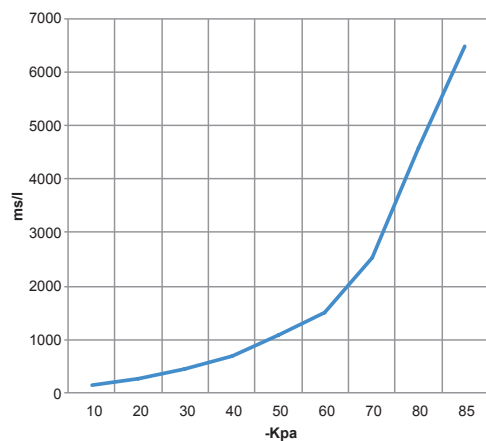

Generator item	Supp. press. bar	Air consumption NI/s	Evacuation rates (ms/l= s/m ³) at different levels of vacuums (-KPa) at optimal supply pressure										Max vacuum -KPa
			10	20	30	40	50	60	70	80	85		
PVP 2	6.0	0.9	128	257	438	675	1087	1511	2523	4572	6492	85	

ACCESSORIES UPON REQUEST

Silencer item SSX 1/8"

