



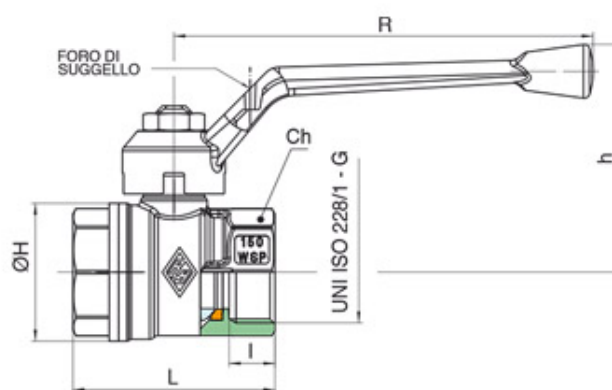

Serie **UNI-SFER**

Articolo **1500**

Full bore ball valve, F/F threaded, with aluminum handle.

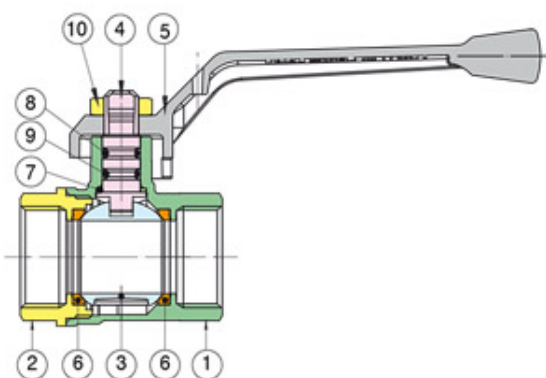

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ALLUMINIO EN AC 46100	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	L	ØH	Ch	R	h	Kv	PN	Kg
1/4"*	8	25	50	1700020000	11	51,5	23	20	95	47,5	5,4	64	0,14
3/8"*	10	25	50	1700030000	11,4	51,5	23	20	95	47,5	6	64	0,13
1/2"	15	50	100	1500040000	12	47,5	30	25	95	47,5	16,3	30	0,16
3/4"	20	25	50	1500050000	12	53	36	31	110	59,5	29,5	30	0,25
1"	25	20	40	1500060000	14,5	65,5	43,5	38	110	62	43	30	0,40
1"1/4	32	10	20	1500070000	16	76,5	53	48	160	75,5	89	25	0,68
1"1/2	40	6	12	1500080000	18	89	65	54	160	81,5	230	25	0,96
2"	50	4	8	1500100000	19	103	80	67	170	99,5	265	25	1,58
2"1/2	65	2	4	1500120000	24	129,5	104	83	205	123,5	540	16	2,65
3"	80	-	4	1500140000	29	155,5	126	98	205	133,5	873	16	4,21
4"	100	-	2	1500180000	32	185	154,5	128	205	147,5	1390	16	7,18

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.


* Art. 1700



Serie **UNI-SFER**

Articolo **1501**

Full bore ball valve, M/F threaded, with aluminum handle.

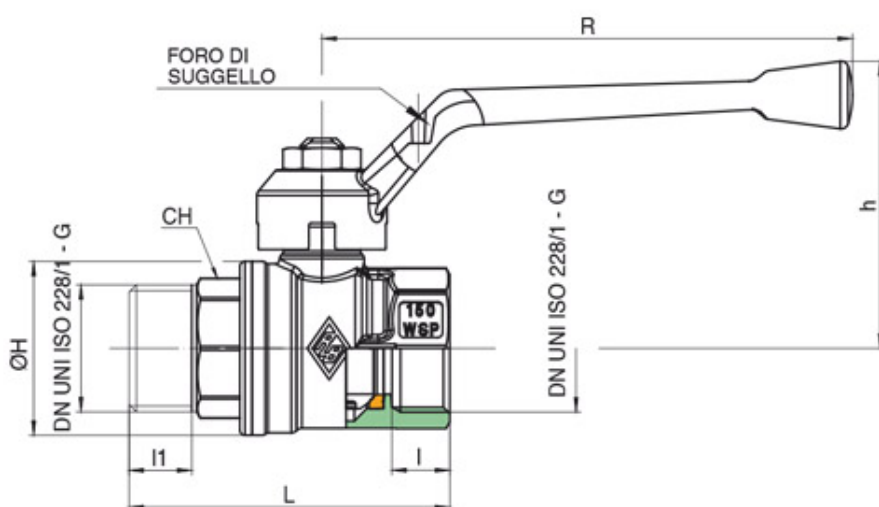


POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ALLUMINIO EN AC 46100	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL.04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	II	L	ØH	Ch	R	h	Kv	PN	Kg
1/4"*	8	25	50	1701020000	11	11	59	23	20	95	47,5	5,4	64	0,14
3/8"*	10	25	50	1701030000	11,4	11,4	59,5	23	20	95	47,5	6	64	0,14
1/2"	15	35	70	1501040000	12	13	59	30	25	95	47,5	16,3	30	0,18
3/4"	20	25	50	1501050000	12	13	66,5	36	31	110	59,5	29,5	30	0,28
1"	25	15	30	1501060000	14,5	15	77,7	43,5	38	110	62	43	30	0,42
1"1/4	32	10	20	1501070000	16	17	91,2	53	48	160	75,5	89	25	0,75
1"1/2	40	6	12	1501080000	18	18	104,7	65	54	160	81,5	230	25	1,07
2"	50	4	8	1501100000	19	22	121	80	67	170	99,5	265	25	1,71

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.


* Art.1701

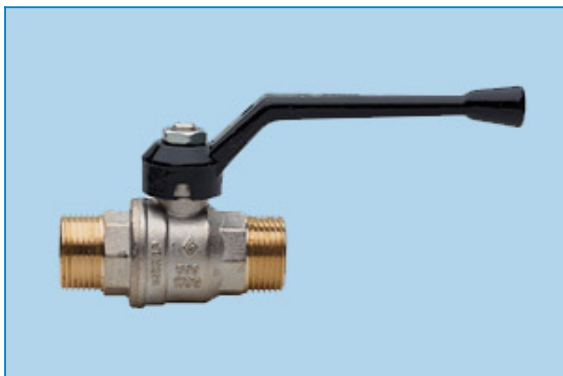

Serie **UNI-SFER**

Articolo **1503**

Full bore ball valve, M/M threaded, with aluminum handle.

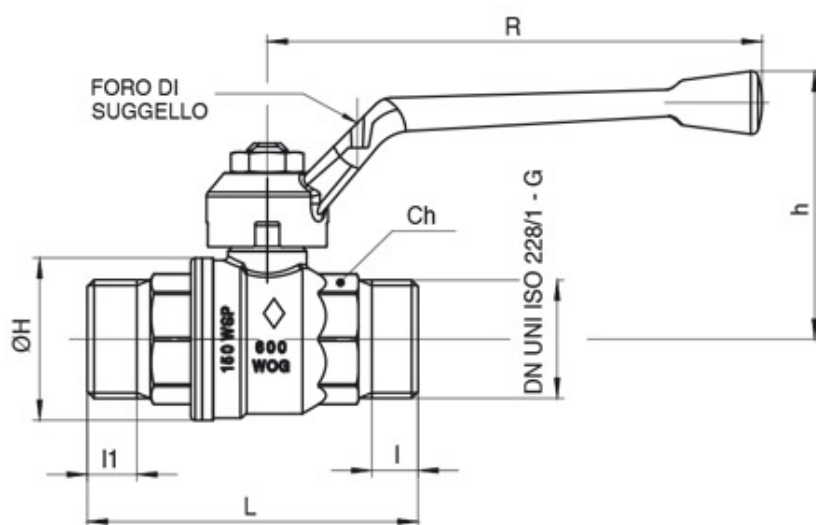

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ALLUMINIO EN AC 46100	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	I1	Ch	ØH	L	h	R	Kv	PN	Kg
1/2"	15	35	70	1503040000	11,5	13	22	30	62,2	47,5	95	16,3	30	0,18
3/4"	20	25	50	1503050000	13,2	14	27	36	73,5	59,5	110	29,5	30	0,30
1"	25	15	30	1503060000	16,5	15	34	43,5	83,8	62	110	43	30	0,44


Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.



Serie **UNI-SFER**

Articolo **1510**

Full bore ball valve, F/F threaded, with steel handle.

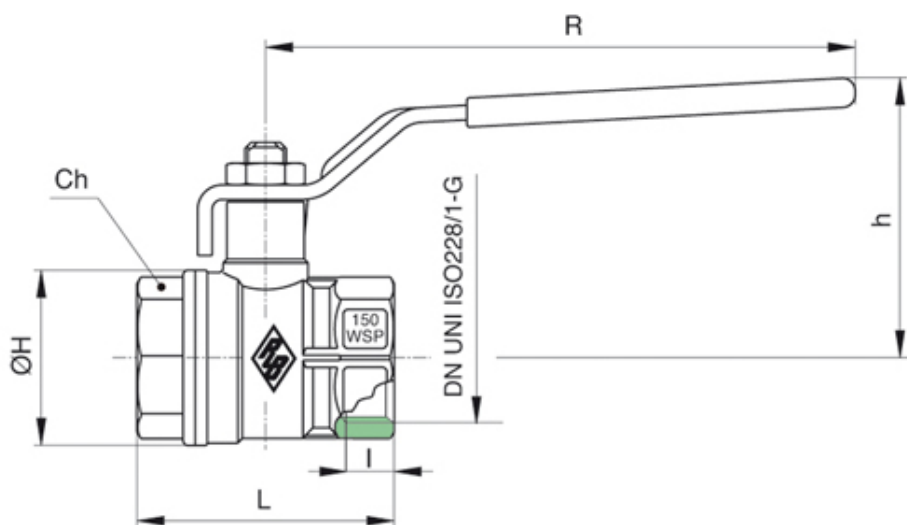


POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ACCIAIO DC04 EN 10020	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	L	ØH	Ch	R	h	Kv	PN	Kg
1/4"*	8	25	50	1710020000	11	51,5	23	20	96	42	5,4	64	0,15
3/8"*	10	25	50	1710030000	11,4	51,5	23	20	96	42	6	64	0,14
1/2"	15	50	100	1510040000	12	47,5	30	25	96	45	16,3	30	0,18
3/4"	20	25	50	1510050000	12	53	36	31	121	56,5	29,5	30	0,28
1"	25	20	40	1510060000	14,5	65,5	43,5	38	121	59	43	30	0,43
1"1/4	32	10	20	1510070000	16	76,5	53	48	151	72,5	89	25	0,74
1"1/2	40	6	12	1510080000	18	89	65	54	151	78,5	230	25	1,06
2"	50	4	8	1510100000	19	103	80	67	160	91,5	265	25	1,70
2"1/2"	65	2	4	1710120000	30,2	152	111	90	206	123	540	25	3,71
3"*	80	-	4	1710140000	33,3	177	136	105	206	133	873	25	5,90
4"	100	-	2	1710180000	39,3	214	166	130	261	165	1390	25	10,00

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.


* Art.1710

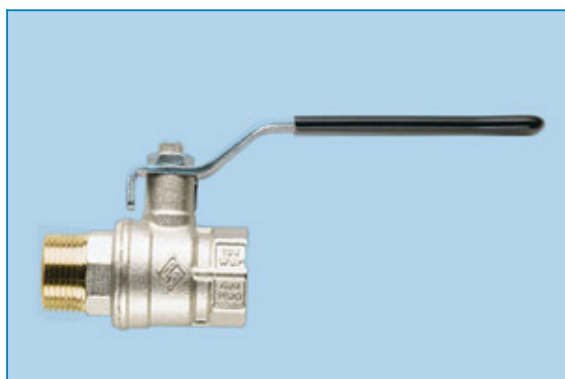

Serie **UNI-SFER**

Articolo **1511**

Full bore ball valve, M/F threaded, with steel handle.

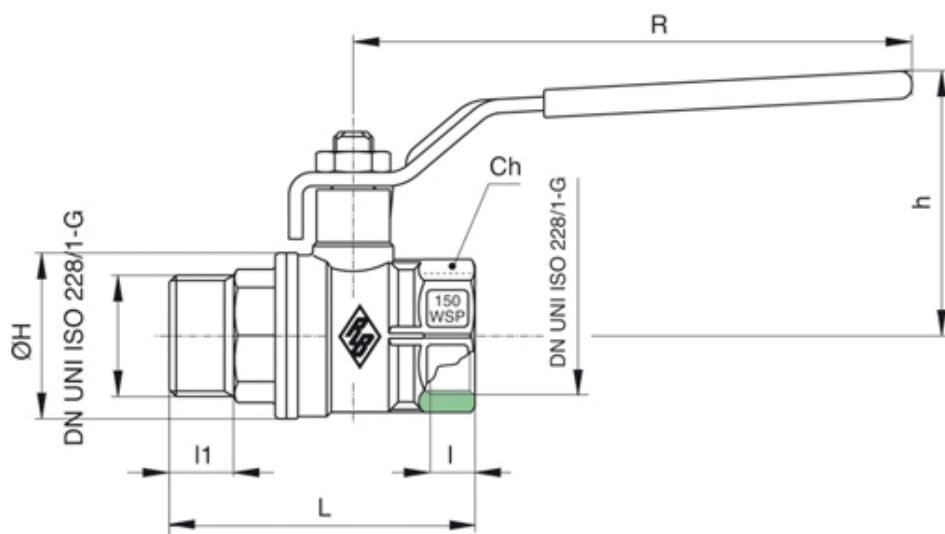

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ACCIAIO DC04 EN 10020	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	II	L	ØH	Ch	R	h	Kv	PN	Kg
1/4"*	8	25	50	1711020000	11	11	59	23	20	96	42	5,4	64	0,15
3/8"*	10	25	50	1711030000	11,4	11,4	59,5	23	20	96	42	6	64	0,14
1/2"	15	35	70	1511040000	12	13	59	30	25	96	45	16,3	30	0,18
3/4"	20	25	50	1511050000	12	13	66,5	36	31	121	56,5	29,5	30	0,28
1"	25	15	30	1511060000	14,5	15	77,7	43,5	38	121	59	43	30	0,43
1"1/4	32	10	20	1511070000	16	17	91,2	53	40	151	72,5	89	25	0,74
1"1/2	40	6	12	1511080000	18	18	104,7	65	54	151	78,5	230	25	1,04
2"	50	4	8	1511100000	19	22	121	80	68	160	91,5	265	25	1,70
2"1/2*	65	2	4	1711120000	30,2	-	175	111	90	206	123	540	25	4,10
3"*	80	-	4	1711140000	33,3	-	203,5	136	105	206	133	873	25	6,30
4"*	100	-	2	1711180000	39,3	-	250	166	130	261	165	1390	25	11,35

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.


* Art.1711



Serie **UNI-SFER**

Articolo **1520**

Full bore ball valve, F/F threaded, with aluminium T-handle.

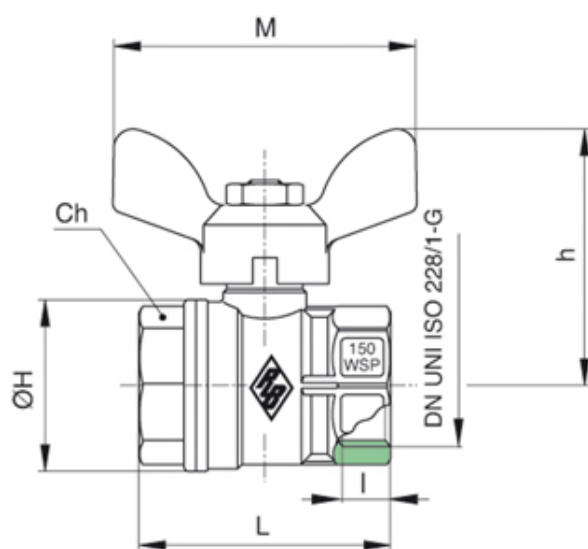

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ACCIAIO DC04 EN 10020	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	L	ØH	Ch	M	h	Kv	PN	Kg
1/4"*	8	25	50	1720020000	11	51,5	23	20	50	42	5,4	64	0,14
3/8"*	10	25	50	1720030000	11,4	51,5	23	20	50	42	6	64	0,12
1/2"	15	50	100	1520040000	12	47,5	30	25	50	40,5	16,3	30	0,14
3/4"	20	35	70	1520050000	12	53	36	31	64	50,5	29,5	30	0,24
1"	25	20	40	1520060000	14,5	65,5	43,5	38	64	53	43	30	0,37

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.


* Art.1720



Serie **UNI-SFER**

Articolo **1521**

Full bore ball valve, M/F threaded, with aluminium T-handle.

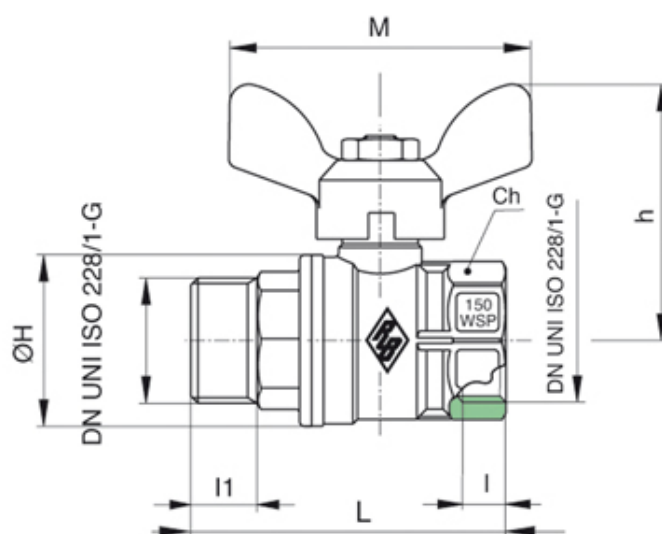

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	HANDLE	ACCIAIO DC04 EN 10020	1
6	BALL SEAT	P.T.F.E	2
7	ANTIFRICTION SEAT	P.T.F.E	1
8	O-RING	FKM	2
9	O-RING	NBR	2
10	NUT	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	I1	L	ØH	Ch	M	h	Kv	PN	Kg
1/4"*	8	25	50	1721020000	11	11	59	23	20	50	42	5,4	64	0,13
3/8"*	10	25	50	1721030000	11,4	11,4	59,5	23	20	50	42	6	64	0,13
1/2"	15	50	100	1521040000	12	13	59	30	25	50	40,5	16,3	30	0,17
3/4"	20	30	60	1521050000	12	13	66,5	36	31	64	50,5	29,5	30	0,27
1"	25	20	40	1521060000	14,5	15	77,7	43,5	38	64	53	43	30	0,41

Limiti di temperatura: -20°C +130°C - Temperature range: -20°C +130°C.

* Art.1721